


# BACKSCATTER NO BURP O-RING INSTALLATION GUIDE

This O-ring eliminates burping the UWL-M52 lens underwater on your TG camera housing. It allows you to pre-seal water from a rinse bucket and eliminates the need to unthread your UWL-M52 lens underwater to “burp” the lens. This O-ring lets you shoot split shots (over/under) on your TG housing with a wet lens. You only need one O-ring installed.

*NOTE: No Burp O-rings are not compatible with the QRS mount system or M52 Air Lens.*


## STEP 1:

Place housing in water and place No Burp O-ring in between the housing's threads.

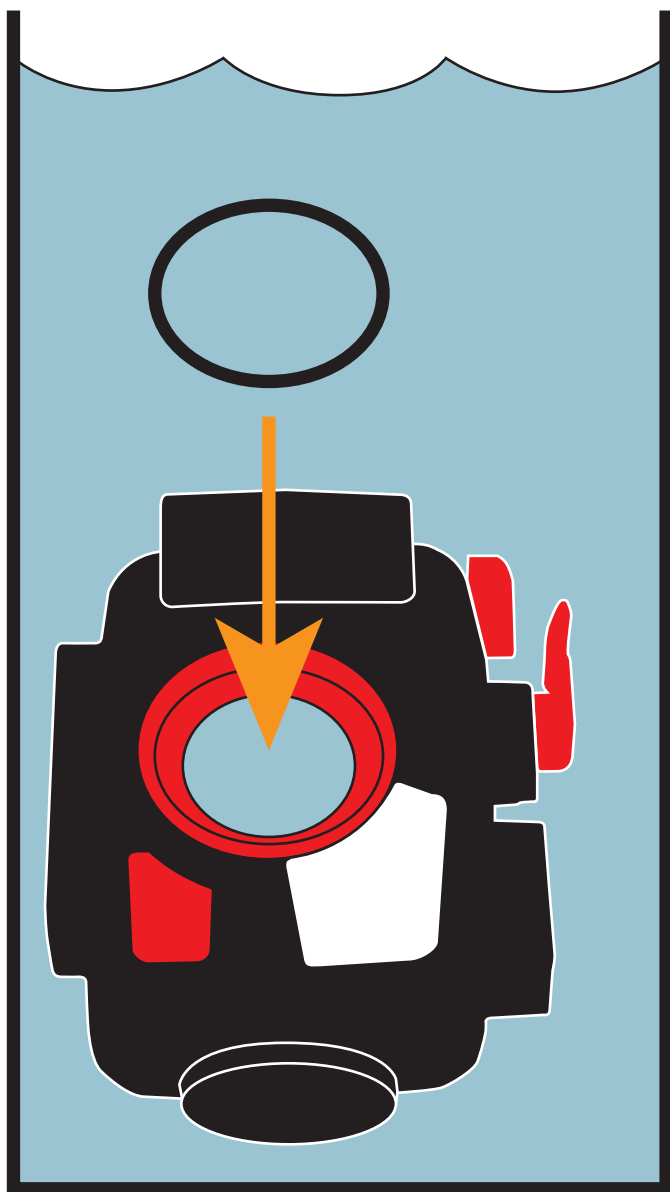

## STEP 2:

Place lens into the water. Make sure there are no bubbles stuck to the back of the lens or housing port.

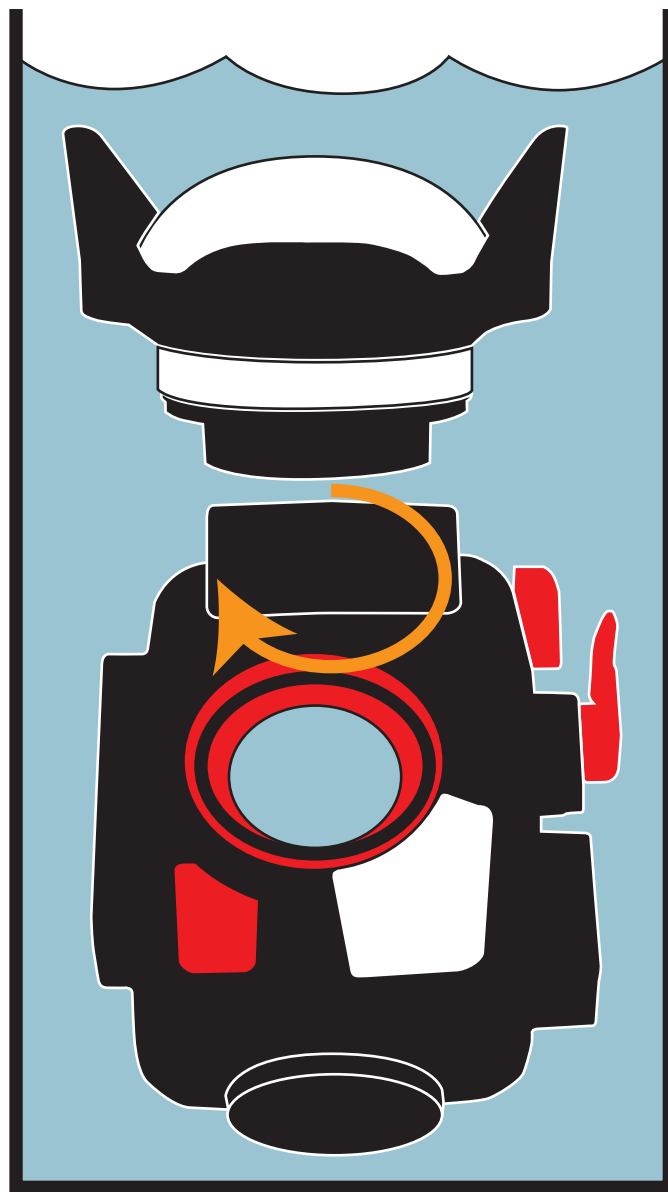

## STEP 3:

Thread lens onto the housing with the No Burp O-ring in between the housing and lens.